


FEATURES:

- UL Listed
- UL approved PCV 10 year non- fade label
- Die-cast zinc tin plated housing
- Tin plated copper soldered back
- 3-way stainless steel ground screws.
- 360 degree gold plated beryllium copper insert pin
- High-density ferrites
- Layered circuit board technology
- Low isolation at the MoCA frequencies
- Low intermodulation distortion
- 6kV surge protection
- Meets or exceeds all applicable SCTE requirements



EAG-SB-6WMS-2.0
6-WAY

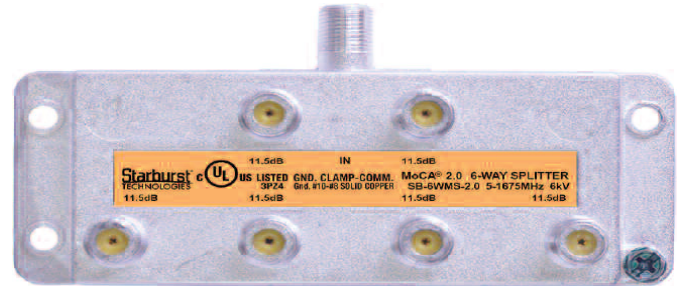

EAG-SB-8WMS-2.0
8-WAY

Measurement	Frequency	6-Way	8-Way
Insertion Loss	5-1000 MHz	≤ 10.5 dB	≤ 12.0 dB
	1000-1350 MHz	≤ 12.0 dB	≤ 13.5 dB
	1350-1675 MHz	≤ 13.5 dB	≤ 15.0 dB
Port to Port	5-1000 MHz	≥ 25 dB	≥ 25 dB
Isolation	1125-1675 Mhz	≤ 25 dB	≤ 25 dB
Return Loss	5-1000 MHz	≥ 18 dB	≥ 18 dB
RFI Isolation	5 - 1675 MHz	≥ 130 dB	≥ 130 dB
Temperature Range	(-40°C to +60° C)		
Surge Protection	CAT A3 6kV, 200A Ring Wave		
Impedance	75 Ohms		